

HBC 1250

PRODUCT DATA SHEET

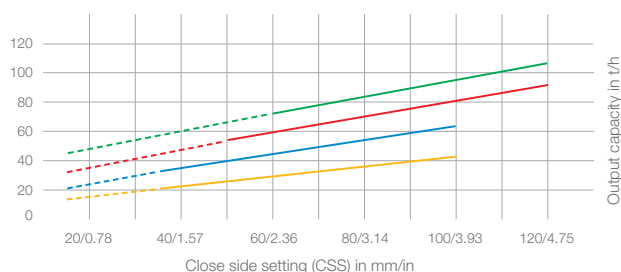


Illustration image

RECOMMENDED ACCESSORIES

- TOOL BOX HBC
- HYDRAULIC ADAPTER SET
- IRON SEPERATOR
- H-Lock QUICK COUPLING SYSTEM
- CRUSH CONTROL
- DUST SUPPRESSION
- ROTATION METER
- BUCKET TEETH

HARTL CRUSHER Performance*



* The production capacities vary based on material, feed size and close side setting. Indicated capacities based on medium hard material crushed under optimal conditions and taking the swivel time into account.

- HBC 650
- HBC 750
- HBC 950
- HBC 1250

MODEL	HBC 1250
Excavator weight lbs**	≥ 77,160
Inlet opening in	49 x 22
Rotation rpm	350
Rated capacity acc. ISO 7451 y³	2.17
Hydraulic motor cc	150
Max. sound power level dB(A)	L _{W,A} 110.5
Oil flow rate US gpm	> 77
Oil pressure psi	3190
CSS toggle STD/OPT in	2.36-4.75/0.48-2.55
Toggle system	Up-thrust
Mainframe construction	HARDOX 450
Crushing unit	Cast iron
Greasing system	Central 1-point
IN/OUT acc. ISO 6162 (SAE J518c)	1 1/4" 6000psi flange
DRAIN acc. ISO 6162 (SAE J518c)	1/2" 3000psi flange
Length in	101.18
Width in	71.65
Height in	61.02
Weight lbs	12,610
Operation temperature °F	14 - 140
HS Code	84742000
Warranty months	12

Right to alter technical information without notice reserved

** Always consult and obey your machines lifting capability guidelines to insure safe operation of the crusher.